



Facom 3/8" Drive Insulated Sockets

Manufactured to EN 60900. Facom is the number one producer of hand tools in Europe. All Facom tools are developed to meet very strict performance, strength, safety and ergonomic criteria. Facom sockets feature their unique OGV profile which ensures better socket/fastener contact and enables higher torques to be applied with greater safety. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

3/8" Drive 12pt Metric Insulated Sockets

Stock No	Size	Diameter	Price
385108	8 mm	17 mm	9.81
385109	9 mm	18 mm	9.81
385110	10 mm	20 mm	9.81
385111	11 mm	21 mm	9.81
385112	12 mm	22 mm	11.10
385113	13 mm	23 mm	11.10
385114	14 mm	25 mm	11.10
385115	15 mm	25 mm	11.10
385116	16 mm	27 mm	11.10
385117	17 mm	27 mm	11.10
385118	18 mm	29 mm	11.10
385119	19 mm	31 mm	11.10

3/8" Drive 12pt Metric Deep Insulated Sockets

Stock No	Size	Diameter	Price
385208	8 mm	19 mm	12.28
385210	10 mm	21 mm	13.31
385211	11 mm	22 mm	13.31
385212	12 mm	22 mm	13.31
385213	13 mm	23 mm	13.31
385214	14 mm	23 mm	13.31
385216	16 mm	25 mm	13.31
385217	17 mm	27 mm	13.31
385218	18 mm	28 mm	13.31
385219	19 mm	29 mm	13.31

Diameter above refers to the outside diameter of the fastener end of the socket.



Facom 3/8" Drive Insulated Hex Bit Sockets

Manufactured to EN 60900. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Size	Overall Length	Price
385224	4 mm	66 mm	13.21
385225	5 mm	66 mm	13.21
385226	6 mm	66 mm	13.21
385227	7 mm	66 mm	13.21
385228	8 mm	66 mm	13.21
385230	10 mm	66 mm	12.15



Facom 3/8" Drive Insulated Ratchet Handle

Manufactured to EN 60900. Sockets and accessories retained by spring ball; retention force 13-16 N. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
385240	180 mm	61.16



Facom 3/8" Drive Insulated T Handle

Manufactured to EN 60900. Sockets and accessories retained by spring ball; retention force 13-16 N. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
385242	205 mm	36.67



Facom 3/8" Drive Insulated Extensions

Manufactured to EN 60900. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
385244	150 mm	16.19
385246	260 mm	21.39



Facom 3/8" Drive Insulated Socket Set

Manufactured to EN 60900. Set of 12 pt standard length sockets and accessories supplied in a strong lightweight plastic case. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Contents	Range	Price
385248	9 pce	8 - 14 mm	180.53

- 6 12 pt Sockets 8, 10, 11, 12, 13, 14 mm
- 2 Extension Bars 150, 260 mm
- 1 Ratchet Handle



Facom 3/8" Drive Insulated Socket Set

Manufactured to EN 60900. Set of 12 pt standard length sockets, standard length hex bit sockets and accessories supplied in a strong lightweight plastic case. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Contents	Range	Price
385250	17 pce	8 - 19 mm	310.01

- 9 12 pt Sockets 8, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 5 Hexagon Bit Sockets 4, 5, 6, 7, 8 mm
- 1 Extension Bar 150 mm
- 1 T Handle
- 1 Ratchet Handle



Facom 1/2" Drive Insulated Sockets

Manufactured to EN 60900. Facom is the number one producer of hand tools in Europe. All Facom tools have been developed to meet very strict performance, strength, safety and ergonomic criteria. Facom sockets feature their unique OGV profile which ensures better socket/fastener contact and enables higher torques to be applied with greater safety. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

1/2" Drive 12pt Metric Insulated Sockets

Stock No	Size	Diameter	Price
125208	8 mm	17 mm	10.38
125209	9 mm	18 mm	10.38
125210	10 mm	19 mm	10.38
125211	11 mm	20 mm	10.38
125212	12 mm	22 mm	11.08
125213	13 mm	23 mm	11.08
125214	14 mm	24 mm	11.08
125217	17 mm	28 mm	11.08
125219	19 mm	32 mm	11.08
125221	21 mm	33 mm	11.08
125222	22 mm	34 mm	11.08

1/2" Drive 12pt Metric Deep Insulated Sockets

Stock No	Size	Diameter	Price
125312	12 mm	22 mm	15.48
125313	13 mm	23 mm	15.48
125314	14 mm	24 mm	15.48
125316	16 mm	27 mm	17.36
125317	17 mm	28 mm	15.90
125318	18 mm	29 mm	18.34
125319	19 mm	32 mm	17.37

Diameter above refers to the outside diameter of the fastener end of the socket.



Looking for an item not listed?
Call our Sales Team on 01224 620944



Facom 1/2" Drive Insulated Hex Bit Sockets

Manufactured to EN 60900. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Size	Overall Length	Price
125328	8 mm	70 mm	15.51
125330	10 mm	70 mm	15.51
125332	12 mm	92 mm	16.01
125334	14 mm	92 mm	16.01
125337	17 mm	92 mm	16.01



Facom 1/2" Drive Insulated Ratchet Handle

Manufactured to EN 60900. Sockets and accessories retained by spring ball; retention force 32-38 N. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
125340	265 mm	68.61



Facom 1/2" Drive Insulated T Handle

Manufactured to EN 60900. Sockets and accessories retained by spring ball; retention force 32-38 N. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
125342	210 mm	35.04



Facom 1/2" Drive Insulated Extensions

Manufactured to EN 60900. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
125344	145 mm	19.39
125346	265 mm	23.29



Facom 1/2" Drive Insulated Socket Set

Manufactured to EN 60900. Set of 12 pt standard length sockets and accessories supplied in a strong lightweight plastic case. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Contents	Range	Price
125348	12 pce	8 - 19 mm	245.84
9 12 pt Sockets 8, 9, 10, 11, 12, 13, 14, 17, 19 mm			
2 Extension Bars 145, 265 mm			
1 Ratchet Handle			



Facom 1/2" Drive Insulated Socket Set

Manufactured to EN 60900. Set of 12 pt standard length sockets, standard length hex bit sockets and accessories supplied in a strong lightweight plastic case. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Contents	Range	Price
125350	17 pce	8 - 19 mm	333.44
9 12 pt Sockets 8, 9, 10, 11, 12, 13, 14, 17, 19 mm			
5 Hexagon Bit Sockets 8, 10, 12, 14, 17 mm			
1 Extension Bar 145 mm			
1 T Handle			
1 Ratchet Handle			



Gedore 1/2" Drive Insulated Sockets

Six point, extra strong sockets with square drive conforming to DIN 3120-C12.5. Made from 31CrV3 chrome vanadium steel with VDE insulation as per EN 60900. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.

1/2" Drive 6pt Metric Insulated Sockets

Stock No	Size	Diameter	Price
122310	10 mm	19.5 mm	12.35
122311	11 mm	20.7 mm	12.35
122312	12 mm	22.0 mm	12.35
122313	13 mm	23.2 mm	12.35

Gedore 1/2" Drive Insulated Sockets CONTINUED >

Stock No	Size	Diameter	Price
122314	14 mm	24.5 mm	12.35
122315	15 mm	25.7 mm	12.35
122316	16 mm	27.0 mm	12.94
122317	17 mm	28.2 mm	13.22
122319	19 mm	30.7 mm	14.01
122322	22 mm	34.5 mm	14.94
122324	24 mm	37.0 mm	14.94
122327	27 mm	40.7 mm	16.52
122330	30 mm	44.5 mm	17.99
122332	32 mm	47.0 mm	19.29

Diameter above refers to the outside diameter of the fastener end of the socket.



Gedore 1/2" Drive Insulated Extensions

Manufactured to EN 60900 and DIN 7434. With screw locking for secure retention of sockets. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
122340	125 mm	22.91
122342	250 mm	29.89



Gedore 1/2" Drive Insulated Ratchet Handle

Manufactured to EN 60900 and DIN 7449. Reversible tool with switching lever. Smooth ratchet action. Sockets held securely according to DIN 3120-C12.5 and can only be removed by pressing the release button. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Length	Price
122344	270 mm	80.55



Gedore 1/2" Drive Insulated Torque Wrench

Manufactured to EN 60900. Dual scaled for metric and imperial torque settings. Robust fine-tooth ratchet head. Unmistakable signal is heard and felt when set torque is reached. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Range	Length	Price
132100	8 - 54 Nm	310 mm	391.66

**We accept Visa and Mastercard
Debit and Credit Cards**



Gedore 1/2" Drive Insulated Socket Set

Manufactured to EN 60900. Set of 6 pt standard length sockets and accessories. Supplied in study PVC case with foam padding insert. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Contents	Range	Price
122346	14 pce	10 - 24 mm	426.63

- 8 6 pt Sockets 10, 12, 13, 14, 17, 19, 22, 24 mm
- 2 Extension Bars 125, 250 mm
- 1 T Handle
- 1 Ratchet Handle
- 1 Slotted Screwdriver 125 x 5.5 mm
- 1 2.5 mm Hexagon Key (Not insulated. For turning locking screw on extensions).



Gedore Insulated Nutspinners

Manufactured to EN 60900 and DIN 7445. Blade and socket made from 31 CrV3 chrome vanadium steel with VDE insulation as per EN 60900. Ergonomic handle. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c. Socket depth 25 mm.

Stock No	Size	Blade Length	Price
068881	3 mm	125 mm	14.68
068882	4 mm	125 mm	14.68
068883	5 mm	125 mm	14.68
068884	6 mm	125 mm	15.16
068885	7 mm	125 mm	16.29
068886	8 mm	125 mm	17.61
068887	9 mm	125 mm	18.88
068888	10 mm	125 mm	19.26
068889	11 mm	125 mm	22.43
068890	12 mm	125 mm	24.05
068891	13 mm	125 mm	26.63
068892	14 mm	125 mm	27.94
068893	17 mm	125 mm	31.75



Facom Insulated Box Wrenches

Manufactured to EN 60900. T handled, six point box wrenches. Two lengths available. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Size	Overall Length	Price
106100	6 mm	135 mm	18.07
106101	8 mm	135 mm	37.15
106102	10 mm	135 mm	37.15
106103	11 mm	135 mm	37.15

Facom Insulated Box Wrenches CONTINUED >


Stock No	Size	Overall Length	Price
106104	12 mm	135 mm	37.15
106105	13 mm	135 mm	45.17
106106	14 mm	135 mm	45.17
106107	10 mm	300 mm	37.15
106108	13 mm	300 mm	45.17
106109	16 mm	300 mm	45.17
106110	17 mm	300 mm	50.19
106111	19 mm	300 mm	50.19



Gedore Insulated Open End Spanners

Manufactured to EN 60900 and DIN 7446. Single ended open spanners. Made from 31 CrV3 chrome vanadium steel with VDE insulation as per EN 60900. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.


Stock No	Size	Length	Price
101009	9 mm	105 mm	10.84
101010	10 mm	105 mm	11.85
101011	11 mm	115 mm	12.59
101012	12 mm	125 mm	12.59
101013	13 mm	135 mm	13.40
101014	14 mm	145 mm	13.40
101015	15 mm	150 mm	13.47
101016	16 mm	155 mm	14.27
101017	17 mm	160 mm	14.27
101019	19 mm	175 mm	14.27
101022	22 mm	200 mm	18.74
101024	24 mm	220 mm	20.90
101027	27 mm	245 mm	22.37
101030	30 mm	265 mm	24.54
101032	32 mm	280 mm	25.49

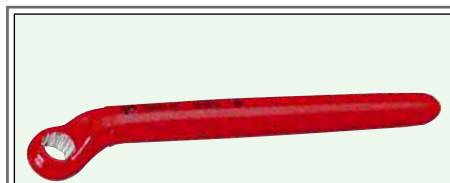

Gedore Insulated Ring Spanners

Manufactured to EN 60900 and DIN 7447. Single ended ring spanner with deep offset ring. Made from 31 CrV3 chrome vanadium steel with VDE insulation as per EN 60900. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.


Stock No	Size	Length	Price
101108	8 mm	170 mm	18.98
101109	9 mm	170 mm	18.98
101110	10 mm	170 mm	19.38
101111	11 mm	180 mm	19.38
101112	12 mm	190 mm	20.04
101113	13 mm	190 mm	20.59
101114	14 mm	210 mm	21.37
101115	15 mm	215 mm	22.03
101117	17 mm	220 mm	22.70
101119	19 mm	240 mm	24.30
101122	22 mm	260 mm	25.77
101124	24 mm	280 mm	28.16
101127	27 mm	295 mm	30.69
101130	30 mm	310 mm	34.68
101132	32 mm	330 mm	34.68

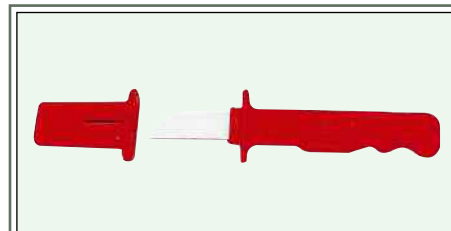

Gedore Insulated Cable Knife

Manufactured to EN 60900. Strong straight blade made from heat treated steel. Supplied with blade protector. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.


Stock No	Blade Length	Overall Length	Price
300700	50 mm	180 mm	10.79

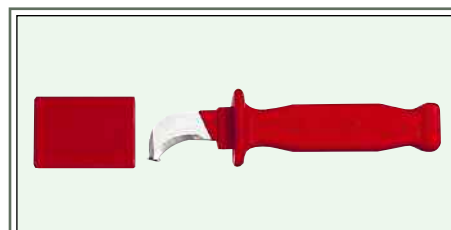

Gedore Insulated Cable Knife

Manufactured to EN 60900. Strong curved blade made from heat treated steel. For slitting and stripping damp-proof installation cables. Supplied with blade protector. All Gedore insulated tools have been tested to guarantee safe working to 1000 volts a.c.


Stock No	Blade Length	Overall Length	Price
300710	40 mm	170 mm	54.58

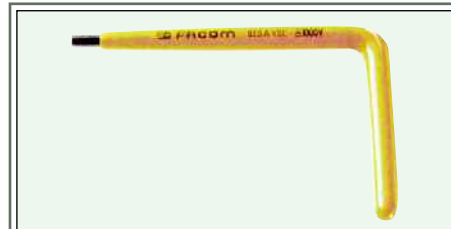

Facom Insulated Hexagon Keys

Manufactured to EN 60900 and ISO 2936. Made from high strength hardened alloy steel with VDE insulation as per EN 60900. All Facom insulated tools have been tested to guarantee safe working to 1000 volts a.c.

Stock No	Size	Length	Price
068103	3 mm	125 mm	9.19
068104	4 mm	125 mm	9.53
068105	5 mm	125 mm	9.93
068106	6 mm	125 mm	10.50
068108	8 mm	125 mm	11.88
068110	10 mm	125 mm	13.43
068112	12 mm	125 mm	12.32

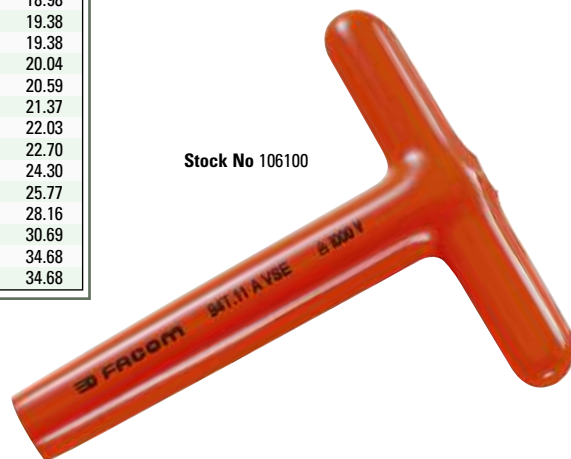

Stock No 106100



Spark Resistant Combination Spanners

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments.

- Features include:
- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
 - High tensile strength (Break 1140 - 1250 N/mm²)
 - Good durability (Hardness 35 - 40 HRc)
 - Specially well suited for applications in corrosive environments.
 - Non-magnetic.
 - Lifetime guarantee.

Metric Copper-Beryllium Combination Spanners

Stock No	Size	Weight	Price
102510	10 mm	80 g	42.83
102511	11 mm	80 g	44.13
102512	12 mm	80 g	46.72
102513	13 mm	90 g	49.32
102514	14 mm	100 g	49.32
102515	15 mm	200 g	54.51
102516	16 mm	200 g	63.60
102517	17 mm	200 g	72.68
102518	18 mm	300 g	73.98
102519	19 mm	300 g	75.28
102520	20 mm	400 g	77.84
102522	22 mm	400 g	86.96
102524	24 mm	500 g	96.04
102527	27 mm	700 g	106.43
102530	30 mm	800 g	123.30
102532	32 mm	900 g	155.74
102536	36 mm	1000 g	175.21
102538	38 mm	1300 g	188.19
102541	41 mm	1300 g	221.94
102546	46 mm	1600 g	258.28
102550	50 mm	1800 g	285.53
102555	55 mm	2000 g	311.49
102560	60 mm	2700 g	337.45

AF Copper-Beryllium Combination Spanners

Stock No	Size	Weight	Price
102568	1/2"	80 g	44.78
102569	9/16"	100 g	45.30
102570	5/8"	200 g	52.95
102571	11/16"	200 g	62.95
102572	3/4"	300 g	67.36
102573	13/16"	400 g	74.37
102574	7/8"	400 g	75.15
102575	15/16"	500 g	93.45
102576	1"	500 g	101.23
102577	1 1/16"	700 g	109.02
102578	1 1/8"	700 g	122.00
102580	1 1/4"	800 g	142.77
102581	1 5/16"	900 g	145.36
102582	1 3/8"	1000 g	181.70
102583	1 7/16"	1000 g	188.19
102584	1 1/2"	1300 g	194.68

Egamaster spark resistant combination spanners are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Spark Resistant Ring Slogging Spanners

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments.

- Features include:
- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
 - High tensile strength (Break 1140 - 1250 N/mm²)
 - Good durability (Hardness 35-40 HRc).
 - Specially well suited for applications in corrosive environments.
 - Non-magnetic.
 - Lifetime guarantee.

Metric Copper-Beryllium Flogging Spanners

Stock No	Size	Weight	Price
102630	30 mm	0.5 kg	81.77
102632	32 mm	0.5 kg	84.36
102636	36 mm	0.6 kg	103.83
102638	38 mm	0.6 kg	123.30
102641	41 mm	0.7 kg	151.85
102646	46 mm	0.8 kg	175.21
102650	50 mm	0.8 kg	197.92
102655	55 mm	1.3 kg	201.17
102660	60 mm	1.4 kg	233.62
102665	65 mm	1.4 kg	272.55
102670	70 mm	1.6 kg	363.40
102675	75 mm	2.3 kg	376.38
102680	80 mm	2.4 kg	434.79

AF Copper-Beryllium Flogging Spanners

Stock No	Size	Weight	Price
102720	1 1/4"	0.5 kg	97.34
102722	1 3/8"	0.6 kg	102.53
102724	1 1/2"	0.6 kg	116.81
102726	1 5/8"	0.7 kg	129.79
102728	1 3/4"	0.8 kg	136.28
102729	1 13/16"	0.8 kg	153.15
102730	1 7/8"	0.8 kg	159.64
102732	2"	0.8 kg	170.02
102736	2 1/4"	1.3 kg	201.17
102737	2 5/16"	1.4 kg	240.11
102738	2 3/8"	1.4 kg	246.60
102740	2 1/2"	1.4 kg	253.08
102741	2 9/16"	1.4 kg	285.53
102742	2 5/8"	1.5 kg	311.49
102744	2 3/4"	2.3 kg	389.36
102747	2 15/16"	2.3 kg	415.32
102748	3"	2.3 kg	428.30
102750	3 1/8"	2.8 kg	467.23

Egamaster spark resistant slogging spanners are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.

Trade Counter open
8.00 am - 5.30 pm Monday to Friday
and 8.30 am - 1.00 pm Saturday



Spark Resistant Adjustable Spanners

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments.

- Features include:
- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
 - High tensile strength (Break 1140-1250 N/mm²).
 - Good durability (Hardness 35-40 HRc).
 - Specially well suited for applications in corrosive environments.
 - Non-magnetic.
 - Measurement scale for quick sizing of bolt heads.
 - Ergonomic handle sleeve that offers a warm comfortable grip.
 - Lifetime guarantee.

Stock No	Length	Jaw Capacity	Price
102606	6" 150 mm	20 mm	87.84
102608	8" 200 mm	25 mm	119.80
102610	10" 250 mm	30 mm	159.74
102612	12" 300 mm	35 mm	179.70
102615	15" 380 mm	48 mm	315.06
102618	18" 460 mm	56 mm	415.32
102624	24" 610 mm	65 mm	682.68

Egamaster spark resistant adjustable spanners are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Spark Resistant Heavy Duty Pipe Wrench

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments.

- Features include:
- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
 - High tensile strength (Break 1140 - 1250 N/mm²).
 - Good durability (Hardness 35-40 HRc).
 - Specially well suited for applications in corrosive environments.
 - Non-magnetic.
 - High capacity wrench for heavy duty applications.
 - Lifetime guarantee.

Stock No	Length	Capacity	Price
176708	8" 200 mm	34 mm	201.17
176710	10" 250 mm	49 mm	233.62
176712	12" 300 mm	60 mm	253.08
176714	14" 360 mm	60 mm	298.51
176718	18" 460 mm	76 mm	363.40
176724	24" 610 mm	90 mm	545.10
176736	36" 910 mm	140 mm	947.44
176748	48" 1220 mm	165 mm	1726.17

Egamaster spark resistant heavy duty pipe wrenches are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.

Stock No 102510





Spark Resistant Punches

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments. Features include:

- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
- High tensile strength (Break 1140 - 1250 N/mm²)
- Good durability (Hardness 35-40 HRC).
- Specially well suited for applications in corrosive environments.
- Non-magnetic.
- Lifetime guarantee.

Copper-Beryllium Parallel Pin Punches

Stock No	Tip Diameter	Length	Price
241970	1.8 mm	110 mm	35.62
241971	2.4 mm	110 mm	37.20
241972	2.8 mm	110 mm	37.20
241973	3 mm	110 mm	37.20
241974	4 mm	120 mm	37.20
241975	5 mm	130 mm	41.70
241976	6 mm	140 mm	45.75
241978	8 mm	150 mm	48.69

Copper-Beryllium Taper Drift Punches

Stock No	Taper	Length	Price
241980	3 - 10 mm	150 mm	53.01
241981	4 - 10 mm	150 mm	53.01
241982	5 - 10 mm	150 mm	53.01
241983	6 - 10 mm	150 mm	53.01
241984	7 - 12 mm	150 mm	63.25
241985	8 - 12 mm	150 mm	63.25
241986	10 - 14 mm	150 mm	75.37
241987	12 - 16 mm	150 mm	88.99
241988	15 - 20 mm	200 mm	177.45
241989	17 - 22 mm	200 mm	245.61
241990	19 - 24 mm	250 mm	245.61
241991	21 - 26 mm	250 mm	292.14

Copper-Beryllium Centre Punches

Stock No	Length	Price
241998	100 mm	44.08
241999	150 mm	68.89

Egamaster spark resistant punches are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Spark Resistant Flat Chisels

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments. Features include:

- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
- High tensile strength (Break 1140 - 1250 N/mm²)
- Good durability (Hardness 35-40 HRC).
- Specially well suited for applications in corrosive environments.
- Non-magnetic.
- Lifetime guarantee.

Stock No	Size	Price
240900	150 x 22 mm	45.44
240902	200 x 22 mm	58.43
240904	250 x 24 mm	78.99

Spark Resistant Flat Chisels CONTINUED >

Stock No	Size	Price
240906	300 x 24 mm	94.14
240908	400 x 27 mm	121.18

Egamaster spark resistant flat chisels are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Spark Resistant Fox Wedges

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments. Features include:

- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
- High tensile strength (Break 1140 - 1250 N/mm²)
- Good durability (Hardness 35-40 HRC).
- Specially well suited for applications in corrosive environments.
- Non-magnetic.
- Lifetime guarantee.

Stock No	Size	Price
240920	180 x 13 x 6 mm	19.47
240922	150 x 25 x 8 mm	19.47
240924	150 x 25 x 13 mm	23.36
240926	180 x 32 x 13 mm	29.85
240928	150 x 40 x 8 mm	25.96
240930	250 x 40 x 30 mm	116.81
240932	150 x 50 x 13 mm	44.13
240934	180 x 50 x 19 mm	66.19
240936	300 x 50 x 40 mm	228.42

Dimensions are Length x Width x Thickness. Egamaster spark resistant fox wedges are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Spark Resistant Hand Scrapers

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments. Features include:

- All tools are forged after casting to provide superior mechanical properties and an attractive finish.
- High tensile strength (Break 1140-1250 N/mm²).
- Good durability (Hardness 35-40 HRC).
- Specially well suited for applications in corrosive environments.
- Non-magnetic.
- Comfortable handle.

Stock No	Blade Width	Overall Length	Price
240950	25 mm	200 mm	57.35
240952	30 mm	200 mm	58.43
240954	40 mm	200 mm	60.59
240956	50 mm	200 mm	62.76
240958	60 mm	200 mm	66.00
240960	75 mm	200 mm	96.30
240962	80 mm	200 mm	96.30
240964	100 mm	200 mm	101.70

Long blade scrapers and other heavy duty scrapers are also available. Egamaster scrapers are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.




Spark Resistant Wire Brushes

Egamaster brand. Made from copper beryllium alloy. Spark resistant tools for use in hazardous environments. Features include:

- High tensile strength (Break 1140-1250 N/mm²).
- Good durability (Hardness 35-40 HRC).
- Specially well suited for applications in corrosive environments.
- Non-magnetic.
- Wooden handle.

Stock No	No. of Rows	Overall Length	Price
229093	3	350 mm	25.38
229094	4	350 mm	28.02
229095	5	350 mm	52.76

Egamaster spark resistant wire brushes are also available in aluminium bronze. Aluminium bronze tools are about 30% cheaper, but they are less hard and have a lower tensile strength.



Titanium Combination Spanners

Egamaster brand. Made from high-tech titanium alloy, Ti6Al-4V. Titanium tools find applications in the petrochemical, military, aerospace, pharmaceutical and medical sectors. Features include:

- Ultra lightweight - 45% lighter than steel.
- Excellent mechanical strength - stronger than standard steel and 10 x stronger than aluminium.
- More spark resistant than traditional non-sparking alloys such as copper beryllium and aluminium bronze.
- Shock resistant - high modulus of elasticity.
- 100% non-magnetic.
- Hypoallergenic.
- Extremely acid resistant.
- Rust and corrosion proof, even when used underwater.
- Ultimate tools for safety and durability offshore.

Stock No	Size	Weight	Price
104006	6 mm	20 g	107.81
104007	7 mm	30 g	107.81
104008	8 mm	30 g	107.81
104009	9 mm	30 g	107.81
104010	10 mm	40 g	168.92
104011	11 mm	40 g	177.57
104012	12 mm	40 g	188.15
104013	13 mm	50 g	217.88
104014	14 mm	50 g	217.88
104015	15 mm	100 g	229.87
104017	17 mm	100 g	312.30
104018	18 mm	125 g	383.51
104019	19 mm	150 g	383.51
104022	22 mm	200 g	402.00
104024	24 mm	250 g	473.13
104025	25 mm	270 g	511.93
104026	26 mm	300 g	552.88
104027	27 mm	350 g	577.67
104028	28 mm	350 g	644.49
104029	29 mm	400 g	663.89
104030	30 mm	410 g	697.30
104032	32 mm	450 g	739.34
104036	36 mm	500 g	1512.09

Egamaster also supply open end and offset ring spanners, including some inch sizes, in titanium alloy.

For ease and accuracy when placing orders please use our stock number



Titanium Adjustable Wrenches

Egamaster brand. Made from high-tech titanium alloy, Ti6Al-4V. Titanium tools find applications in the petrochemical, military, aerospace, pharmaceutical and medical sectors. Features include:

- Ultra lightweight – 45% lighter than steel.
- Excellent mechanical strength – stronger than standard steel and 10 x stronger than aluminium.
- More spark resistant than traditional non-sparking alloys such as copper beryllium and aluminium bronze.
- Shock resistant – high modulus of elasticity.
- 100% non-magnetic.
- Hypoallergenic.
- Extremely acid resistant.
- Rust and corrosion proof, even when used underwater.
- Ultimate tools for safety and durability offshore.
- Measurement scale for quick sizing of bolt heads.

Stock No	Length	Weight	Price
104056	6" 150 mm	60 g	285.08
104058	8" 200 mm	110 g	521.71
104060	10" 250 mm	220 g	614.26



Titanium Pliers

Egamaster brand. Made from high-tech titanium alloy, Ti6Al-4V. Titanium tools find applications in the petrochemical, military, aerospace, pharmaceutical and medical sectors. Features include:

- Ultra lightweight – 45% lighter than steel.
- Excellent mechanical strength – stronger than standard steel and 10 x stronger than aluminium.
- More spark resistant than traditional non-sparking alloys such as copper beryllium and aluminium bronze.
- Shock resistant – high modulus of elasticity.
- 100% non-magnetic.
- Hypoallergenic.
- Extremely acid resistant.
- Rust and corrosion proof (better than stainless steel).
- Two component handle grips for strength and comfort.

Titanium Combination Pliers

Stock No	Length	Price
168560	6" 160 mm	432.25
168562	8" 200 mm	496.29

Titanium Long Nose Pliers

Stock No	Length	Price
168564	7" 180 mm	421.01
168566	8" 200 mm	516.82

Titanium Sidecutters

Stock No	Length	Price
168568	6" 160 mm	381.35
168570	8" 200 mm	516.82

Egamaster also supply crimping pliers, circlip pliers, gland pliers and slip-joint pliers in titanium alloy.



Titanium Tweezers

Egamaster brand. Made from high-tech titanium alloy, Ti6Al-4V. Titanium tools find applications in the petrochemical, military, aerospace, pharmaceutical and medical sectors. Features include:

- Ultra lightweight – 45% lighter than steel.
- Excellent mechanical strength – stronger than standard steel and 10 x stronger than aluminium.
- More spark resistant than traditional non-sparking alloys such as copper beryllium and aluminium bronze.
- 100% non-magnetic.
- Hypoallergenic.
- Extremely acid resistant.
- Rust and corrosion proof. (better than stainless steel)

Stock No	Description	Length	Price
063280	Fine Tip	155 mm	158.46
063281	Bent Tip	155 mm	158.46
063282	Standard Tip	155 mm	158.46



Titanium Screwdrivers

Egamaster brand. Made from high-tech titanium alloy, Ti6Al-4V. Titanium tools find applications in the petrochemical, military, aerospace, pharmaceutical and medical sectors. Features include:

- Ultra lightweight – 45% lighter than steel.
- Excellent mechanical strength – stronger than standard steel and 10 x stronger than aluminium.
- More spark resistant than traditional non-sparking alloys such as copper beryllium and aluminium bronze.
- Shock resistant – high modulus of elasticity.
- 100% non-magnetic.
- Hypoallergenic.
- Extremely acid resistant.
- Rust and corrosion proof (better than stainless steel).
- Comfortable, non-slip, two component handle.

Electricians Screwdrivers. Parallel tipped blades for slotted screws.

Stock No	Blade Length	Tip Width	Price
066500	50 mm	3 mm	50.85
066502	100 mm	3 mm	50.85
066504	150 mm	3 mm	50.85
066506	100 mm	4 mm	50.85
066508	150 mm	4 mm	69.35
066510	100 mm	5 mm	69.35
066512	150 mm	5 mm	69.35
066514	100 mm	6 mm	80.83
066516	125 mm	6 mm	95.17
066518	150 mm	8 mm	123.94
066520	200 mm	10 mm	129.44
066522	300 mm	10 mm	147.92

Phillips Screwdrivers

Stock No	Blade Length	Tip Size	Price
066530	75 mm	No. 0	46.23
066531	100 mm	No. 1	50.85
066532	150 mm	No. 2	73.97
066533	200 mm	No. 3	97.07
066534	250 mm	No. 4	120.18

